

数量総括表

川本808号線 No. 1

[illegible]

数量総括表

川本808号線 No. 2

[illegible]

道 路 土 工 総 括 表

川本808号線

種 別	飛散土	横断流用土		ダンプ運搬土 L=0.12km		残土運搬土 L=0.19km				合 計
		盛土量	地山換算量	盛土量	地山換算量	盛土量	地山換算量	盛土量	地山換算量	
土砂片切	146.5	494.3	549.2	2,076.8	2,307.6	1,677.2	1,863.6			4,866.9
合 計	146.5	(494.3)	549.2	(2076.8)	2,307.6	(1677.2)	1,863.6			4,866.9
										(4,248.3)

盛土工

種 別	盛土量
路体盛土	2,556.7
路床盛土	
埋土盛土	14.4
合 計	2,571.1

地山換算係数

土砂	/0.90
軟岩Ⅰ	/1.15
軟岩Ⅱ	/1.20
中硬岩	/1.25

切 土 区 分 計 算 書

区分		土量(Q)m³	距離(D)m	Q×D	平均距離	運搬区分			飛逸分	ダンプ施工						
飛逸散土量		146.5				切土区分	土質区分	土量(m³)		比率	横断流用 土量(m³)	掘削・運搬 土量(m³)	運搬盛土 土量(m³)	距離(m)	残土処理 土量(m³)	距離(m)
バック ホウ 施工	横断流用		494.3			片切 人力併用 機械掘削	砂・砂質土									
	小計		494.3				粘性土									
	運搬盛土「 20 m 未満」	1					礫質土	4,248.3	1.000	(146.5)	494.3		2,076.8	124	1,677.2	194
		2					岩塊・玉石土									
		3				軟岩Ⅰ										
		4														
		5				オープンカット	砂・砂質土									
		6				バックホウ	礫質土									
		7				or ブルドーザ	岩塊玉石軟									
		8				片切 人力併用 機械掘削	軟岩Ⅰ									
		9					軟岩Ⅱ									
		10					中硬岩									
		11					硬岩Ⅰ									
		12				オープンカット 大型ブレーカ	軟岩Ⅰ									
		13					軟岩Ⅱ									
14					中硬岩											
小計				硬岩Ⅰ												
計		494.3				計		4,248.3	1.000	146.5	494.3		2,076.8		1,677.2	
ダ ンプ 施 工	運搬盛土「 20 m 以上」	1	29.1	32	931.2	流用土	排水構造物工 (残土)									
		2	32.8	40	1,312.0		素掘り水路 (残土)									
		3	48.9	135	6,601.5	小計		0.0								
		4	19.6	6	117.6		盛土可能量									
		5	184.7	22	4,063.4											
		6	329.4	129	42,492.6											
		7	129.6	33	4,276.8											
		8	6.2	247	1,531.4											
		9	1,296.5	151	195,771.5											
		10														
	11															
	12															
	13															
	14															
	15															
小計	2,076.8		257,098.0	124												
残土処理	1	1,677.2	194	325,376.8												
	2															
	3															
	4															
	5															
	6															
	7															
	8															
	9															
小計	1,677.2		325,376.8	194												
計		3,754.0														
切取合計		4,248.3														

累 加 土 量 計 算 書

川本808号線

測 点	距 離	切 取 数 量										盛 土 数 量							横 断 流 用	差 引 土 量	累 加 土 量	追 加 距 離	
		土 砂		岩 盤		排水構造物工 (残土)		素掘り水路 (残土)				切 土 合 計	路 体 (BA1)	路 床 (BA2)	埋 土 (BA3)								盛 土 合 計
		片 切 (CA)	オープン (MCA)	片 切 (RA)	オープン (MRA)	土砂	岩盤	土砂	岩盤	土砂	岩盤												
BP	0.0																						0.0
BC.1	7.7	5.4										5.4	0.8						0.8	0.8	4.6	4.6	7.7
SP.1	4.6	6.0										6.0	1.6						1.6	1.6	4.4	9.0	12.3
EC.1	4.6	11.1										11.1	1.2						1.2	1.2	9.9	18.9	16.9
NO.1	3.1	9.5										9.5									9.5	28.4	20.0
BC.2	13.0	33.5										33.5									33.5	61.9	33.0
NO.2	7.0	10.7										10.7									10.7	72.6	40.0
SP.2	1.5	1.4										1.4									1.4	74.0	41.5
EC.2	8.5	4.4										4.4	0.4						0.4	0.4	4.0	78.0	50.1
BC.3	9.9	0.5										0.5	6.9						6.9	0.5	-6.4	71.6	60.0
NO.3	0.0																					71.6	60.0
SP.3	9.6												13.4						13.4		-13.4	58.2	69.6
EC.3	9.6	3.0										3.0	12.0						12.0	3.0	-9.0	49.2	79.2
NO.4	0.8	0.5										0.5	0.8						0.8	0.5	-0.3	48.9	80.0
BC.4	14.1	14.1										14.1	7.1						7.1	7.1	7.0	55.9	94.1
NO.5	5.9	5.9										5.9	0.3						0.3	0.3	5.6	61.5	100.0
SP.4	4.4	2.7										2.7	0.4						0.4	0.4	2.3	63.8	104.4
EC.4	10.3	6.3										6.3	1.0						1.0	1.0	5.3	69.1	114.7
NO.6	5.3	4.2										4.2	0.3						0.3	0.3	3.9	73.0	120.0
BC.5	3.2	3.1										3.1									3.1	76.1	123.2
SP.5	12.9	6.2										6.2	0.6						0.6	0.6	5.6	81.7	136.2
NO.7	3.8												0.4						0.4		-0.4	81.3	140.0
EC.5	9.1	0.5										0.5	19.6						19.6	0.5	-19.1	62.2	149.1
BC.6	8.3	0.4										0.4	71.0						71.0	0.4	-70.6	-8.4	157.4
NO.8	2.6												37.4						37.4		-37.4	-45.8	160.0
SP.6	8.8	3.7										3.7	56.8						56.8	3.7	-53.1	-98.9	168.8
NO.9	11.2	4.6										4.6	62.7		1.1				63.8	4.6	-59.2	-158.1	180.0
EC.6	0.2												2.2						2.2		-2.2	-160.3	180.2
BC.7	2.6												29.1		0.5				29.6		-29.6	-189.9	182.9
SP.7	5.3												68.4		6.4				74.8		-74.8	-264.7	188.2
EC.7	5.3												64.1		6.1				70.2		-70.2	-334.9	193.6
NO.10	6.4	16.2										16.2	36.2		0.3				36.5	16.2	-20.3	-355.2	200.0

累 加 土 量 計 算 書

川本808号線

測 点	距 離	切 取 数 量											盛 土 数 量							横 断 流 用	差 引 土 量	累 加 土 量	追 加 距 離
		土 砂		岩 盤		排水構造物工 (残土)		素掘り水路 (残土)				切 土 合 計	路 体 (BA1)	路 床 (BA2)	埋 土 (BA3)				盛 土 合 計				
		片 切 (CA)	オープン (MCA)	片 切 (RA)	オープン (MRA)	土砂	岩盤	土砂	岩盤	土砂	岩盤												
BC.8	6.4	34.0										34.0	14.4						14.4	14.4	19.6	-335.6	206.4
SP.8	6.1	17.0										17.0	37.8						37.8	17.0	-20.8	-356.4	212.5
EC.8	6.1												79.6						79.6		-79.6	-436.0	218.6
NO.11	1.4												23.1						23.1		-23.1	-459.1	220.0
BC.9	3.4	4.2										4.2	54.2						54.2	4.2	-50.0	-509.1	223.4
SP.9	5.5	31.2										31.2	42.4						42.4	31.2	-11.2	-520.3	228.9
EC.9	5.5	49.0										49.0									49.0	-471.3	234.5
BC.10	3.5	29.7										29.7	1.4						1.4	1.4	28.3	-443.0	238.0
NO.12	2.0	19.3										19.3	1.4						1.4	1.4	17.9	-425.1	240.0
SP.10	8.2	39.7										39.7	32.0						32.0	32.0	7.7	-417.4	248.2
NO.12+15.00	6.8	57.3										57.3	32.4						32.4	32.4	24.9	-392.5	255.0
EC.10	3.4	55.1										55.1									55.1	-337.4	258.4
NO.13	1.6	15.8										15.8									15.8	-321.6	260.0
BC.11	3.3	17.3										17.3									17.3	-304.3	263.3
SP.11	5.9	29.6										29.6	0.6						0.6	0.6	29.0	-275.3	269.2
EC.11	5.9	37.1										37.1	0.6						0.6	0.6	36.5	-238.8	275.0
BC.12	0.4	3.2										3.2									3.2	-235.6	275.4
NO.14	4.6	35.4										35.4									35.4	-200.2	280.0
SP.12	4.9	1.8										1.8									1.8	-198.4	284.9
EC.12	9.5	6.1										6.1	0.1						0.1	0.1	6.0	-192.4	294.4
BC.13	4.1	13.8										13.8	3.3						3.3	3.3	10.5	-181.9	298.5
NO.15	1.5	2.5										2.5	2.3						2.3	2.3	0.2	-181.7	300.0
SP.13	8.3	11.3										11.3	6.2						6.2	6.2	5.1	-176.6	308.3
EC.13	9.8	35.6										35.6	2.0						2.0	2.0	33.6	-143.0	318.0
NO.16	2.0	12.4										12.4	0.8						0.8	0.8	11.6	-131.4	320.0
NO.17	20.0	120.5										120.5	12.0						12.0	12.0	108.5	-22.9	340.0
BC.14	3.3	19.3										19.3	2.6						2.6	2.6	16.7	-6.2	343.3
SP.14	11.4	35.7										35.7	54.0						54.0	35.7	-18.3	-24.5	354.6
NO.18	5.4												47.5						47.5		-47.5	-72.0	360.0
ECBC15	6.0	2.9										2.9	38.0						38.0	2.9	-35.1	-107.1	366.0
SP.15	8.0	5.9										5.9	33.2						33.2	5.9	-27.3	-134.4	373.9
NO.19	6.1	11.4										11.4	12.8						12.8	11.4	-1.4	-135.8	380.0

累 加 土 量 計 算 書

川本808号線

測 点	距 離	切 取 数 量											盛 土 数 量							横 断 流 用	差 引 土 量	累 加 土 量	追 加 距 離
		土 砂		岩 盤		排水構造物工 (残土)		素掘り水路 (残土)				切 土 合 計	路 体 (BA1)	路 床 (BA2)	埋 土 (BA3)				盛 土 合 計				
		片 切 (CA)	オープン (MCA)	片 切 (RA)	オープン (MRA)	土砂	岩盤	土砂	岩盤	土砂	岩盤												
EC.15	1.9	5.9										5.9	2.5						2.5	2.5	3.4	-132.4	381.9
BC.16	6.1	30.4										30.4	4.0						4.0	4.0	26.4	-106.0	388.0
SP.16	8.1	53.8										53.8									53.8	-52.2	396.1
NO.20	3.9	25.2										25.2									25.2	-27.0	400.0
EC.16	4.2	25.3										25.3	0.2						0.2	0.2	25.1	-1.9	404.2
BC.17	3.1	17.3										17.3	0.3						0.3	0.3	17.0	15.1	407.2
SP.17	7.4	23.9										23.9	4.1						4.1	4.1	19.8	34.9	414.7
NO.21	5.3	8.8										8.8	4.5						4.5	4.5	4.3	39.2	420.0
EC.17	2.1	5.1										5.1	1.5						1.5	1.5	3.6	42.8	422.1
BC.18	0.6	1.4										1.4	0.4						0.4	0.4	1.0	43.8	422.7
SP.18	8.2	24.0										24.0	4.9						4.9	4.9	19.1	62.9	430.9
EC.18	8.2	31.1										31.1	2.5						2.5	2.5	28.6	91.5	439.1
NO.22	0.9	3.8										3.8	0.1						0.1	0.1	3.7	95.2	440.0
BC.19	0.1	0.5										0.5									0.5	95.7	440.1
SP.19	7.2	15.8										15.8	1.1						1.1	1.1	14.7	110.4	447.4
EC.19	7.2	16.9										16.9	1.4						1.4	1.4	15.5	125.9	454.6
NO.23	5.4	21.0										21.0	0.5						0.5	0.5	20.5	146.4	460.0
NO.24	20.0	41.0										41.0									41.0	187.4	480.0
BC.20	17.9	69.6										69.6									69.6	257.0	497.9
NO.25	2.1	14.5										14.5									14.5	271.5	500.0
SP.20	2.6	17.0										17.0									17.0	288.5	502.6
EC.20	4.7	29.2										29.2									29.2	317.7	507.2
BC.21	6.3	39.1										39.1									39.1	356.8	513.5
SP.21	6.4	29.9										29.9									29.9	386.7	519.9
NO.26	0.1	0.4										0.4									0.4	387.1	520.0
EC.21	6.3	27.3										27.3									27.3	414.4	526.3
BC.22	6.4	35.2										35.2									35.2	449.6	532.7
NO.27	7.3	33.8										33.8	2.3						2.3	2.3	31.5	481.1	540.0
SP.22	3.3	15.2										15.2	2.0						2.0	2.0	13.2	494.3	543.3
ECBC23	10.6	31.3										31.3	3.5						3.5	3.5	27.8	522.1	553.9
NO.28	6.1	16.2										16.2									16.2	538.3	560.0
SP.23	4.5	13.6										13.6									13.6	551.9	564.5

累 加 土 量 計 算 書

川本808号線

測 点	距 離	切 取 数 量											盛 土 数 量							横 断 流 用	差 引 土 量	累 加 土 量	追 加 距 離
		土 砂		岩 盤		排水構造物工 (残土)		素掘り水路 (残土)				切 土 合 計	路 体 (BA1)	路 床 (BA2)	埋 土 (BA3)				盛 土 合 計				
		片 切 (CA)	オープン (MCA)	片 切 (RA)	オープン (MRA)	土砂	岩盤	土砂	岩盤	土砂	岩盤												
EC.23,BC.24	10.6	22.6										22.6	0.5						0.5	0.5	22.1	574.0	575.1
NO.29	4.9	6.8										6.8	0.5						0.5	0.5	6.3	580.3	580.0
SP.24	0.2	0.3										0.3									0.3	580.6	580.2
EC.24	5.2	15.9										15.9	0.3						0.3	0.3	15.6	596.2	585.4
BC.25	1.7	8.0										8.0									8.0	604.2	587.1
SP.25	6.0	34.0										34.0									34.0	638.2	593.1
EC.25	6.0	29.3										29.3									29.3	667.5	599.1
NO.30	0.9	2.8										2.8									2.8	670.3	600.0
IP.26	3.2	10.1										10.1									10.1	680.4	603.2
NO.31	16.8	64.5										64.5									64.5	744.9	620.0
BC.27	4.2	19.0										19.0									19.0	763.9	624.2
SP.27	8.5	37.4										37.4	0.4						0.4	0.4	37.0	800.9	632.7
NO.32	7.3	51.9										51.9	0.4						0.4	0.4	51.5	852.4	640.0
EC.27	1.2	12.0										12.0									12.0	864.4	641.2
BC.28	2.6	25.8										25.8									25.8	890.2	643.8
SP.28	5.1	39.8										39.8									39.8	930.0	648.9
EC.28	5.1	28.7										28.7									28.7	958.7	654.0
BC.29	3.4	19.0										19.0									19.0	977.7	657.4
NO.33	2.6	14.5										14.5									14.5	992.2	660.0
SP.29	4.5	33.2										33.2									33.2	1025.4	664.5
ECBC30	7.2	147.7										147.7									147.7	1173.1	671.7
SP.30	7.2	174.4										174.4	7.9						7.9	7.9	166.5	1339.6	678.9
NO.34	1.1	18.3										18.3	2.4						2.4	2.4	15.9	1355.5	680.0
EC.30	6.1	72.5										72.5	9.8						9.8	9.8	62.7	1418.2	686.1
BC.31	1.3	9.4										9.4	1.3						1.3	1.3	8.1	1426.3	687.4
SP.31	5.7	39.1										39.1	4.0						4.0	4.0	35.1	1461.4	693.1
EC.31	5.7	51.8										51.8	1.1						1.1	1.1	50.7	1512.1	698.8
NO.35	1.2	14.0										14.0									14.0	1526.1	700.0
BC.32	16.4	209.8										209.8									209.8	1735.9	716.4
NO.36	3.6	60.0										60.0									60.0	1795.9	720.0
SP.32	8.6	72.3										72.3	39.7						39.7	39.7	32.6	1828.5	728.6
NO.37	11.4	64.1										64.1	53.0						53.0	53.0	11.1	1839.6	740.0

累 加 土 量 計 算 書

川本808号線

測 点	距 離	切 取 数 量										盛 土 数 量							横 断 流 用	差 引 土 量	累 加 土 量	追 加 距 離	
		土 砂		岩 盤		排水構造物工 (残土)		素掘り水路 (残土)				切 土 合 計	路 体 (BA1)	路 床 (BA2)	埋 土 (BA3)								盛 土 合 計
		片 切 (CA)	オープン (MCA)	片 切 (RA)	オープン (MRA)	土砂	岩盤	土砂	岩盤	土砂	岩盤												
EC.32	0.7	7.2										7.2								7.2	1846.8	740.7	
BC.33	8.1	54.1										54.1								54.1	1900.9	748.9	
NO.38	11.1	45.5										45.5	0.6					0.6	0.6	44.9	1945.8	760.0	
SP.33	1.8	6.9										6.9	0.2					0.2	0.2	6.7	1952.5	761.8	
EC.33	12.9	82.8										82.8	0.6					0.6	0.6	82.2	2034.7	774.8	
NO.39	5.2	45.8										45.8	0.3					0.3	0.3	45.5	2080.2	780.0	
BC.34	3.0	25.9										25.9	0.3					0.3	0.3	25.6	2105.8	783.0	
SP.34	11.7	109.0										109.0	1.1					1.1	1.1	107.9	2213.7	794.7	
NO.40	5.3	33.5										33.5	0.5					0.5	0.5	33.0	2246.7	800.0	
EC.34	6.4	100.4										100.4	0.3					0.3	0.3	100.1	2346.8	806.4	
BC.35	7.7	125.4										125.4								125.4	2472.2	814.2	
NO.41	5.8	50.1										50.1								50.1	2522.3	820.0	
SP.35	3.6	24.6										24.6								24.6	2546.9	823.6	
ECBC36	9.4	49.2										49.2	5.6					5.6	5.6	43.6	2590.5	833.0	
NO.42	7.0	44.6										44.6	5.6					5.6	5.6	39.0	2629.5	840.0	
SP.36	2.4	21.8										21.8	1.0					1.0	1.0	20.8	2650.3	842.4	
EC.36	9.4	75.1										75.1	3.3					3.3	3.3	71.8	2722.1	851.8	
NO.43	8.2	56.9										56.9	1.2					1.2	1.2	55.7	2777.8	860.0	
BC.37	6.8	63.8										63.8								63.8	2841.6	866.8	
SP.37	7.6	89.6										89.6								89.6	2931.2	874.4	
NO.44	5.6	39.2										39.2	0.6					0.6	0.6	38.6	2969.8	880.0	
EC.37	2.0	4.3										4.3	0.4					0.4	0.4	3.9	2973.7	882.0	
BC.38	12.8	16.2										16.2	26.9					26.9	16.2	-10.7	2963.0	894.8	
NO.45	5.2	1.8										1.8	20.8					20.8	1.8	-19.0	2944.0	900.0	
SP.38	8.4	2.5										2.5	33.6					33.6	2.5	-31.1	2912.9	908.4	
NO.46	11.6	2.0										2.0	36.5					36.5	2.0	-34.5	2878.4	920.0	
EC.38	2.0	0.2										0.2	4.6					4.6	0.2	-4.4	2874.0	922.0	
BC.39	2.1	0.2										0.2	4.8					4.8	0.2	-4.6	2869.4	924.1	
SP.39	3.4	0.8										0.8	7.1					7.1	0.8	-6.3	2863.1	927.4	
EC.39	3.4	2.1										2.1	18.2					18.2	2.1	-16.1	2847.0	930.8	
NO.46+13.00	2.2	1.9										1.9	19.4					19.4	1.9	-17.5	2829.5	933.0	
BC.40	3.4	3.0										3.0	29.9					29.9	3.0	-26.9	2802.6	936.4	

川本808号線

測 点	距 離	切 取 数 量										盛 土 数 量							横 断 流 用	差 引 土 量	累 加 土 量	追 加 距 離	
		土 砂		岩 盤		排水構造物工 (残土)		素掘り水路 (残土)				切 土 合 計	路 体 (BA1)	路 床 (BA2)	埋 土 (BA3)								盛 土 合 計
		片 切 (CA)	オープン (MCA)	片 切 (RA)	オープン (MRA)	土砂	岩盤	土砂	岩盤	土砂	岩盤												
NO.47	3.6	1.5										1.5	106.2						106.2	1.5	-104.7	2697.9	940.0
SP.40	4.7												235.9						235.9		-235.9	2462.0	944.7
EC.40	8.3	2.5										2.5	409.2						409.2	2.5	-406.7	2055.3	953.0
NO.48	7.0	6.1										6.1	251.0						251.0	6.1	-244.9	1810.4	960.0
EP	12.4	11.3										11.3	144.5						144.5	11.3	-133.2	1677.2	972.4
																							</

川本808号線

測 点	距 離	土 砂 掘 削											
		片 切 (CA)						オ ー プ ン (MCA)					
		修正距離	断面積	体 積	飛散土量	盛土可能 土 量	盛土土量 変 化 率	修正距離	断面積	体 積	飛散土量	盛土可能 土 量	盛土土量 変 化 率
					0.03	0.97	0.90				0.03	0.97	0.90
BP	0.0		0.6										
BC.1	7.7		1.0	6.2	0.2	6.0	5.4						
SP.1	4.6		2.0	6.9	0.2	6.7	6.0						
EC.1	4.6		3.5	12.7	0.4	12.3	11.1						
NO.1	3.1		3.5	10.9	0.3	10.6	9.5						
BC.2	13.0		2.4	38.4	1.2	37.2	33.5						
NO.2	7.0		1.1	12.3	0.4	11.9	10.7						
SP.2	1.5		1.1	1.7	0.1	1.6	1.4						
EC.2	8.5		0.1	5.1	0.2	4.9	4.4						
BC.3	9.9			0.5		0.5	0.5						
NO.3	0.0												
SP.3	9.6												
EC.3	9.6		0.7	3.4	0.1	3.3	3.0						
NO.4	0.8		0.7	0.6		0.6	0.5						
BC.4	14.1		1.6	16.2	0.5	15.7	14.1						
NO.5	5.9		0.7	6.8	0.2	6.6	5.9						
SP.4	4.4		0.7	3.1	0.1	3.0	2.7						
EC.4	10.3		0.7	7.2	0.2	7.0	6.3						
NO.6	5.3		1.1	4.8	0.1	4.7	4.2						
BC.5	3.2		1.1	3.5	0.1	3.4	3.1						
SP.5	12.9			7.1	0.2	6.9	6.2						
NO.7	3.8												
EC.5	9.1		0.1	0.5		0.5	0.5						
BC.6	8.3			0.4		0.4	0.4						
NO.8	2.6												
SP.6	8.8	7.6	1.1	4.2	0.1	4.1	3.7						
NO.9	11.2	9.7		5.3	0.2	5.1	4.6						
EC.6	0.2												
BC.7	2.6												
SP.7	5.3												
EC.7	5.3												
NO.10	6.4		5.8	18.6	0.6	18.0	16.2						
BC.8	6.4		6.4	39.0	1.2	37.8	34.0						

川本808号線

測 点	距 離	土 砂 掘 削											
		片 切 (CA)						オ ー プ ン (MCA)					
		修正距離	断面積	体 積	飛散土量	盛土可能 土 量	盛土土量 変 化 率	修正距離	断面積	体 積	飛散土量	盛土可能 土 量	盛土土量 変 化 率
					0.03	0.97	0.90				0.03	0.97	0.90
SP.8	6.1			19.5	0.6	18.9	17.0						
EC.8	6.1												
NO.11	1.4												
BC.9	3.4		2.8	4.8	0.1	4.7	4.2						
SP.9	5.5		10.2	35.8	1.1	34.7	31.2						
EC.9	5.5		10.2	56.1	1.7	54.4	49.0						
BC.10	3.5		9.2	34.0	1.0	33.0	29.7						
NO.12	2.0	2.4	9.2	22.1	0.7	21.4	19.3						
SP.10	8.2	9.2	0.7	45.5	1.4	44.1	39.7						
NO.12+15.00	6.8	7.6	16.6	65.7	2.0	63.7	57.3						
EC.10	3.4	3.8	16.6	63.1	1.9	61.2	55.1						
NO.13	1.6		6.0	18.1	0.5	17.6	15.8						
BC.11	3.3		6.0	19.8	0.6	19.2	17.3						
SP.11	5.9		5.5	33.9	1.0	32.9	29.6						
EC.11	5.9		8.9	42.5	1.3	41.2	37.1						
BC.12	0.4		8.9	3.6	0.1	3.5	3.2						
NO.14	4.6	5.1	7.0	40.5	1.2	39.3	35.4						
SP.12	4.9	0.3	7.0	2.1	0.1	2.0	1.8						
EC.12	9.5	1.1	5.8	7.0	0.2	6.8	6.1						
BC.13	4.1		1.9	15.8	0.5	15.3	13.8						
NO.15	1.5		1.9	2.9	0.1	2.8	2.5						
SP.13	8.3		1.2	12.9	0.4	12.5	11.3						
EC.13	9.8		7.1	40.7	1.2	39.5	35.6						
NO.16	2.0		7.1	14.2	0.4	13.8	12.4						
NO.17	20.0		6.7	138.0	4.1	133.9	120.5						
BC.14	3.3		6.7	22.1	0.7	21.4	19.3						
SP.14	11.4	12.2		40.9	1.2	39.7	35.7						
NO.18	5.4	5.8											
ECBC15	6.0	6.5	1.0	3.3	0.1	3.2	2.9						
SP.15	8.0		0.7	6.8	0.2	6.6	5.9						
NO.19	6.1		3.6	13.1	0.4	12.7	11.4						
EC.15	1.9		3.6	6.8	0.2	6.6	5.9						
BC.16	6.1		7.8	34.8	1.0	33.8	30.4						

川本808号線

測 点	距 離	土 砂 掘 削											
		片 切 (CA)						オ ー プ ン (MCA)					
		修正距離	断面積	体 積	飛散土量	盛土可能 土 量	盛土土量 変 化 率	修正距離	断面積	体 積	飛散土量	盛土可能 土 量	盛土土量 変 化 率
					0.03	0.97	0.90				0.03	0.97	0.90
SP.16	8.1		7.4	61.6	1.8	59.8	53.8						
NO.20	3.9		7.4	28.9	0.9	28.0	25.2						
EC.16	4.2		6.4	29.0	0.9	28.1	25.3						
BC.17	3.1		6.4	19.8	0.6	19.2	17.3						
SP.17	7.4		1.0	27.4	0.8	26.6	23.9						
NO.21	5.3		2.8	10.1	0.3	9.8	8.8						
EC.17	2.1		2.8	5.9	0.2	5.7	5.1						
BC.18	0.6		2.8	1.7	0.1	1.6	1.4						
SP.18	8.2		3.9	27.5	0.8	26.7	24.0						
EC.18	8.2		4.8	35.7	1.1	34.6	31.1						
NO.22	0.9		4.8	4.3	0.1	4.2	3.8						
BC.19	0.1		4.8	0.5		0.5	0.5						
SP.19	7.2		0.2	18.0	0.5	17.5	15.8						
EC.19	7.2		5.2	19.4	0.6	18.8	16.9						
NO.23	5.4		3.7	24.0	0.7	23.3	21.0						
NO.24	20.0		1.0	47.0	1.4	45.6	41.0						
BC.20	17.9		7.9	79.7	2.4	77.3	69.6						
NO.25	2.1		7.9	16.6	0.5	16.1	14.5						
SP.20	2.6		7.1	19.5	0.6	18.9	17.0						
EC.20	4.7		7.1	33.4	1.0	32.4	29.2						
BC.21	6.3		7.1	44.7	1.3	43.4	39.1						
SP.21	6.4		3.6	34.2	1.0	33.2	29.9						
NO.26	0.1		3.6	0.4		0.4	0.4						
EC.21	6.3		6.3	31.2	0.9	30.3	27.3						
BC.22	6.4		6.3	40.3	1.2	39.1	35.2						
NO.27	7.3	6.3	6.0	38.7	1.2	37.5	33.8						
SP.22	3.3	2.9	6.0	17.4	0.5	16.9	15.2						
ECBC23	10.6	7.9	3.1	35.9	1.1	34.8	31.3						
NO.28	6.1	5.3	3.9	18.6	0.6	18.0	16.2						
SP.23	4.5	4.0	3.9	15.6	0.5	15.1	13.6						
EC.23,BC.24	10.6	9.4	1.6	25.9	0.8	25.1	22.6						
NO.29	4.9		1.6	7.8	0.2	7.6	6.8						
SP.24	0.2		1.6	0.3		0.3	0.3						

川本808号線

測 点	距 離	土 砂 掘 削											
		片 切 (CA)						オ ー プ ン (MCA)					
		修正距離	断面積	体 積	飛散土量	盛土可能 土 量	盛土土量 変 化 率	修正距離	断面積	体 積	飛散土量	盛土可能 土 量	盛土土量 変 化 率
					0.03	0.97	0.90				0.03	0.97	0.90
EC.24	5.2		5.4	18.2	0.5	17.7	15.9						
BC.25	1.7		5.4	9.2	0.3	8.9	8.0						
SP.25	6.0		7.6	39.0	1.2	37.8	34.0						
EC.25	6.0		3.6	33.6	1.0	32.6	29.3						
NO.30	0.9		3.6	3.2	0.1	3.1	2.8						
IP.26	3.2		3.6	11.5	0.3	11.2	10.1						
NO.31	16.8		5.2	73.9	2.2	71.7	64.5						
BC.27	4.2		5.2	21.8	0.7	21.1	19.0						
SP.27	8.5		4.9	42.9	1.3	41.6	37.4						
NO.32	7.3		11.4	59.5	1.8	57.7	51.9						
EC.27	1.2		11.4	13.7	0.4	13.3	12.0						
BC.28	2.6		11.4	29.6	0.9	28.7	25.8						
SP.28	5.1		6.5	45.6	1.4	44.2	39.8						
EC.28	5.1		6.4	32.9	1.0	31.9	28.7						
BC.29	3.4		6.4	21.8	0.7	21.1	19.0						
NO.33	2.6		6.4	16.6	0.5	16.1	14.5						
SP.29	4.5		10.5	38.0	1.1	36.9	33.2						
ECBC30	7.2		36.5	169.2	5.1	164.1	147.7						
SP.30	7.2		19.0	199.8	6.0	193.8	174.4						
NO.34	1.1		19.0	20.9	0.6	20.3	18.3						
EC.30	6.1		8.2	83.0	2.5	80.5	72.5						
BC.31	1.3		8.2	10.7	0.3	10.4	9.4						
SP.31	5.7		7.5	44.7	1.3	43.4	39.1						
EC.31	5.7		13.3	59.3	1.8	57.5	51.8						
NO.35	1.2		13.3	16.0	0.5	15.5	14.0						
BC.32	16.4		16.0	240.3	7.2	233.1	209.8						
NO.36	3.6	4.3	16.0	68.8	2.1	66.7	60.0						
SP.32	8.6	9.8	0.9	82.8	2.5	80.3	72.3						
NO.37	11.4	13.1	10.3	73.4	2.2	71.2	64.1						
EC.32	0.7	0.8	10.3	8.2	0.2	8.0	7.2						
BC.33	8.1		5.0	62.0	1.9	60.1	54.1						
NO.38	11.1		4.4	52.2	1.6	50.6	45.5						
SP.33	1.8		4.4	7.9	0.2	7.7	6.9						

川本808号線

測 点	距 離	土 砂 掘 削											
		片 切 (CA)						オ ー プ ン (MCA)					
		修正距離	断面積	体 積	飛散土量	盛土可能 土 量	盛土土量 変 化 率	修正距離	断面積	体 積	飛散土量	盛土可能 土 量	盛土土量 変 化 率
					0.03	0.97	0.90				0.03	0.97	0.90
EC.33	12.9		10.3	94.8	2.8	92.0	82.8						
NO.39	5.2		9.9	52.5	1.6	50.9	45.8						
BC.34	3.0		9.9	29.7	0.9	28.8	25.9						
SP.34	11.7	15.5	6.2	124.8	3.7	121.1	109.0						
NO.40	5.3	6.2	6.2	38.4	1.2	37.2	33.5						
EC.34	6.4	7.3	25.3	115.0	3.5	111.5	100.4						
BC.35	7.7		12.0	143.6	4.3	139.3	125.4						
NO.41	5.8		7.8	57.4	1.7	55.7	50.1						
SP.35	3.6		7.8	28.1	0.8	27.3	24.6						
ECBC36	9.4		4.2	56.4	1.7	54.7	49.2						
NO.42	7.0		10.4	51.1	1.5	49.6	44.6						
SP.36	2.4		10.4	25.0	0.8	24.2	21.8						
EC.36	9.4		7.9	86.0	2.6	83.4	75.1						
NO.43	8.2		8.0	65.2	2.0	63.2	56.9						
BC.37	6.8		13.5	73.1	2.2	70.9	63.8						
SP.37	7.6		13.5	102.6	3.1	99.5	89.6						
NO.44	5.6		2.5	44.8	1.3	43.5	39.2						
EC.37	2.0		2.5	5.0	0.2	4.8	4.3						
BC.38	12.8		0.4	18.6	0.6	18.0	16.2						
NO.45	5.2		0.4	2.1	0.1	2.0	1.8						
SP.38	8.4		0.3	2.9	0.1	2.8	2.5						
NO.46	11.6		0.1	2.3	0.1	2.2	2.0						
EC.38	2.0		0.1	0.2		0.2	0.2						
BC.39	2.1		0.1	0.2		0.2	0.2						
SP.39	3.4		0.4	0.9		0.9	0.8						
EC.39	3.4		1.0	2.4	0.1	2.3	2.1						
NO.46+13.00	2.2		1.0	2.2	0.1	2.1	1.9						
BC.40	3.4		1.0	3.4	0.1	3.3	3.0						
NO.47	3.6			1.8	0.1	1.7	1.5						
SP.40	4.7												
EC.40	8.3		0.7	2.9	0.1	2.8	2.5						
NO.48	7.0		1.3	7.0	0.2	6.8	6.1						
EP	12.4		0.8	13.0	0.4	12.6	11.3						

[illegible]

曲線部・測点間距離修正表

川本808号線

CA:土砂掘削

測点番号	測点間距離	曲線 番号	曲線番号及び 曲線半径	中心線との 偏倚長 (d)	平均偏倚長 d	修正率 (c)=(R±d)/R	修正距離
BC.6		IP.6	R=12 左				
NO.8	2.6		-12.0		0.000	1.000	
SP.6	8.8		-12.0	3.20	1.600	0.867	7.6
NO.9	11.2		-12.0		1.600	0.867	9.7
EC.6	0.2		-12.0		0.000	1.000	
BC.10		IP.10	R=13 右				
NO.12	2.1		13.0	3.25	1.625	1.125	2.4
SP.10	8.2		13.0	0.00	1.625	1.125	9.2
NO.12+15	6.8		13.0	3.24	1.620	1.125	7.6
EC.10	3.4		13.0		1.620	1.125	3.8
BC.12		IP.12	R=12 左	3.49			
NO.14	6.0		-12.0		1.745	0.855	5.1
SP.12	0.4		-12.0	3.52	1.760	0.853	0.3
EC.12	1.6		-12.0	3.52	3.520	0.707	1.1
BC.14		IP.14	R=12 右				
SP.14	11.4		12.0	1.72	0.860	1.072	12.2
NO.18	5.4		12.0		0.860	1.072	5.8
ECBC15	6.0		12.0	1.86	0.930	1.078	6.5
BC.22		IP.22	R=12 左	3.33			
NO.27	7.3		-12.0		1.665	0.861	6.3
SP.22	3.3		-12.0	3.02	1.510	0.874	2.9
ECBC23	10.6		-12.0	3.16	3.090	0.743	7.9
NO.28	6.1		-12.0		1.580	0.868	5.3
SP.23	4.5		-12.0	2.70	1.350	0.888	4.0
EC.23	10.6		-12.0		1.350	0.888	9.4
BC.32		IP.32	R=12 右	4.34			
NO.36	3.6		12.0		2.170	1.181	4.3
SP.32	8.6		12.0	3.29	1.645	1.137	9.8
NO.37	11.5		12.0		1.645	1.137	13.1
EC.32	0.7		12.0	3.20	1.600	1.133	0.8
BC.34		IP.14	R=12 右	3.91			
SP.34	11.7		12.0	3.85	3.880	1.323	15.5
NO.40	5.3		12.0		1.925	1.160	6.2
EC.34	6.4		12.0	3.28	1.640	1.137	7.3

曲線部・測点間距離修正表

川本808号線

BA1:路体

測点番号	測点間距離	曲線 番号	曲線番号及び 曲線半径	中心線との 偏倚長 (d)	平均偏倚長 d	修正率 (c)=(R±d)/R	修正距離
BC.6		IP.6	R=12 左	-2.79			
NO.8	2.6		-12.0		-1.395	1.116	2.9
SP.6	8.8		-12.0		0.000	1.000	
NO.9	11.2		-12.0		0.000	1.000	
EC.6	0.2		-12.0	-2.18	-1.090	1.091	0.2
BC.10		IP.10	R=13 右				
NO.12	2.1		13.0	-4.67	-2.335	0.820	1.7
SP.10	8.2		13.0	-5.38	-5.025	0.613	5.0
NO.12+15	6.8		13.0		-2.690	0.793	5.4
EC.10	3.4		13.0		0.000	1.000	
BC.12		IP.12	R=12 左	-1.23			
NO.14	6.0		-12.0		-0.615	1.051	6.3
SP.12	0.4		-12.0	-1.37	-0.685	1.057	0.4
EC.12	1.6		-12.0	-0.82	-1.095	1.091	1.7
BC.14		IP.14	R=12 右				
SP.14	11.4		12.0	-3.12	-1.560	0.870	9.9
NO.18	5.4		12.0		-1.560	0.870	4.7
ECBC15	6.0		12.0	-4.51	-2.255	0.812	4.9
BC.22		IP.22	R=12 左	-1.78			
NO.27	7.3		-12.0		-0.890	1.074	7.8
SP.22	3.3		-12.0	-0.74	-0.370	1.031	3.4
ECBC23	10.6		-12.0	-1.77	-1.255	1.105	11.7
NO.28	6.1		-12.0		-0.885	1.074	6.5
SP.23	4.5		-12.0		0.000	1.000	
EC.23	10.6		-12.0		0.000	1.000	
BC.32		IP.32	R=12 右				
NO.36	3.6		12.0		0.000	1.000	
SP.32	8.6		12.0	-2.42	-1.210	0.899	7.7
NO.37	11.5		12.0		-1.210	0.899	10.3
EC.32	0.7		12.0		0.000	1.000	
BC.34		IP.14	R=12 右	-0.44			
SP.34	11.7		12.0	-1.21	-0.825	0.931	10.9
NO.40	5.3		12.0		-0.605	0.950	5.0
EC.34	6.4		12.0	-1.77	-0.885	0.926	5.9

盛土法面整形① 数量計算書

測 点	盛土法面-L				盛土法面-R			
	点間距離	法長	平 均	面 積	点間距離	法長	平 均	面 積
BP	0.00	0.0	-----	-----	0.00		-----	-----
BC.1	7.74	1.1	0.55	4.3	7.74			
SP.1	4.60	1.4	1.25	5.8	4.60			
EC.1	4.59	0.0	0.70	3.2	4.59			
NO.1	3.07				3.07			
BC.2	13.00				13.00			
NO.2	7.00				7.00			
SP.2	1.54				1.54			
EC.2	8.54				8.54	0.1	0.05	0.4
BC.3	9.90	0.1	0.05	0.5	9.90	0.5	0.30	3.0
NO.3	0.02	0.1	0.10	0.0	0.02	0.5	0.50	0.0
SP.3	9.57	0.1	0.10	1.0	9.57	2.3	1.40	13.4
EC.3	9.59	0.0	0.05	0.5	9.59	2.3	2.30	22.1
NO.4	0.84				0.84	2.3	2.30	1.9
BC.4	14.07				14.07	0.0	1.15	16.2
NO.5	5.93				5.93			
SP.4	4.40				4.40			
EC.4	10.33				10.33			
NO.6	5.27				5.27			
BC.5	3.25				3.25			
SP.5	12.91				12.91	0.5	0.25	3.2
NO.7	3.84				3.84	0.5	0.50	1.9
EC.5	9.07	0.1	0.05	0.5	9.07	5.6	3.05	27.7
BC.6	8.33	0.1	0.10	0.8	8.33	8.8	7.20	60.0
NO.8	2.60	0.1	0.10	0.3	2.60	8.8	8.80	22.9
SP.6	8.80	0.0	0.05	0.4	8.80	0.0	4.40	38.7
NO.9	11.20	0.3	0.15	1.7	11.20	5.6	2.80	31.4
EC.6	0.21	0.3	0.30	0.1	0.21	5.6	5.60	1.2
BC.7	2.64	0.3	0.30	0.8	2.64	5.6	5.60	14.8
SP.7	5.35	1.2	0.75	4.0	5.35	5.8	5.70	30.5
EC.7	5.35	0.4	0.80	4.3	5.35	5.8	5.80	31.0
NO.10	6.45	0.0	0.20	1.3	6.45	4.0	4.90	31.6
BC.8	6.44				6.44	8.0	6.00	38.6
SP.8	6.10				6.10	8.5	8.25	50.3
EC.8	6.10				6.10	8.9	8.70	53.1
NO.11	1.36				1.36	8.9	8.90	12.1
BC.9	3.38				3.38	9.5	9.20	31.1
SP.9	5.55				5.55	0.0	4.75	26.4
EC.9	5.55				5.55			
BC.10	3.47				3.47	5.5	2.75	9.5

盛土法面整形① 数量計算書

測 点	盛土法面-L				盛土法面-R			
	点間距離	法長	平 均	面 積	点間距離	法長	平 均	面 積
NO. 12	2.05				2.05	5.5	5.50	11.3
SP. 10	8.17				8.17	10.7	8.10	66.2
NO. 12+15.00	6.83				6.83	0.0	5.35	36.5
EC. 10	3.38				3.38			
NO. 13	1.62				1.62	0.0	0.00	0.0
BC. 11	3.26				3.26	0.0	0.00	0.0
SP. 11	5.90				5.90	0.3	0.15	0.9
EC. 11	5.89				5.89	0.0	0.15	0.9
BC. 12	0.36				0.36	0.0	0.00	0.0
NO. 14	4.59				4.59	0.0	0.00	0.0
SP. 12	4.92				4.92	0.0	0.00	0.0
EC. 12	9.51				9.51	0.2	0.10	1.0
BC. 13	4.06				4.06	5.4	2.80	11.4
NO. 15	1.51				1.51	5.4	5.40	8.2
SP. 13	8.26				8.26	0.2	2.80	23.1
EC. 13	9.78				9.78	2.7	1.45	14.2
NO. 16	1.96				1.96	2.7	2.70	5.3
NO. 17	20.00				20.00	土場法面 A=275.9m ²		
BC. 14	3.26				3.26			
SP. 14	11.36				11.36			
NO. 18	5.38				5.38			
ECBC15	5.98				5.98			
SP. 15	7.96				7.96			
NO. 19	6.06				6.06			
EC. 15	1.90				1.90			
BC. 16	6.05				6.05			
SP. 16	8.11				8.11			
NO. 20	3.94				3.94			
EC. 16	4.17				4.17	0.3	0.15	0.6
BC. 17	3.06				3.06	0.3	0.30	0.9
SP. 17	7.45				7.45	3.4	1.85	13.8
NO. 21	5.32				5.32	1.2	2.30	12.2
EC. 17	2.13				2.13	1.2	1.20	2.6
BC. 18	0.59				0.59	1.2	1.20	0.7
SP. 18	8.19				8.19	0.7	0.95	7.8
EC. 18	8.19				8.19	0.3	0.50	4.1
NO. 22	0.90				0.90	0.3	0.30	0.3
BC. 19	0.12				0.12	0.3	0.30	0.0
SP. 19	7.24				7.24	0.3	0.30	2.2
EC. 19	7.24				7.24	0.3	0.30	2.2

盛土法面整形① 数量計算書

測 点	盛土法面-L				盛土法面-R			
	点間距離	法長	平 均	面 積	点間距離	法長	平 均	面 積
NO. 23	5.40				5.40	0.0	0.15	0.8
NO. 24	20.00				20.00	0.2	0.10	2.0
BC. 20	17.91				17.91	0.0	0.10	1.8
NO. 25	2.09				2.09			
SP. 20	2.57				2.57			
EC. 20	4.66				4.66			
BC. 21	6.26				6.26			
SP. 21	6.40				6.40			
NO. 26	0.11				0.11			
EC. 21	6.29				6.29	0.1	0.05	0.3
BC. 22	6.37				6.37	0.1	0.10	0.6
NO. 27	7.34				7.34	0.6	0.35	2.6
SP. 22	3.26				3.26	0.6	0.60	2.0
ECBC23	10.60				10.60	0.1	0.35	3.7
NO. 28	6.14				6.14	0.0	0.05	0.3
SP. 23	4.46				4.46			
EC. 23, BC. 24	10.61				10.61	0.7	0.35	3.7
NO. 29	4.93				4.93	0.7	0.70	3.5
SP. 24	0.23				0.23	0.7	0.70	0.2
EC. 24	5.16				5.16	0.0	0.35	1.8
BC. 25	1.74				1.74			
SP. 25	6.00				6.00			
EC. 25	6.00				6.00			
NO. 30	0.87				0.87			
IP. 26	3.21				3.21			
NO. 31	16.79				16.79			
BC. 27	4.21				4.21			
SP. 27	8.50				8.50	0.2	0.10	0.9
NO. 32	7.29				7.29	0.0	0.10	0.7
EC. 27	1.22				1.22			
BC. 28	2.62				2.62			
SP. 28	5.08				5.08			
EC. 28	5.08				5.08			
BC. 29	3.35				3.35			
NO. 33	2.64				2.64			
SP. 29	4.55				4.55	0.1	0.05	0.2
ECBC30	7.19				7.19	0.0	0.05	0.4
SP. 30	7.20				7.20	1.3	0.65	4.7
NO. 34	1.06				1.06	1.3	1.30	1.4
EC. 30	6.13				6.13	0.7	1.00	6.1

盛土法面整形① 数量計算書

測 点	盛土法面-L				盛土法面-R			
	点間距離	法長	平 均	面 積	点間距離	法長	平 均	面 積
BC. 31	1. 27				1. 27	0. 7	0. 70	0. 9
SP. 31	5. 72				5. 72	0. 6	0. 65	3. 7
EC. 31	5. 71				5. 71	0. 0	0. 30	1. 7
NO. 35	1. 17				1. 17			
BC. 32	16. 37				16. 37			
NO. 36	3. 63				3. 63			
SP. 32	8. 56				8. 56	6. 5	3. 25	27. 8
NO. 37	11. 44				11. 44	0. 0	3. 25	37. 2
EC. 32	0. 74				0. 74			
BC. 33	8. 14				8. 14			
NO. 38	11. 12				11. 12	0. 5	0. 25	2. 8
SP. 33	1. 82				1. 82	0. 5	0. 50	0. 9
EC. 33	12. 95				12. 95	0. 2	0. 35	4. 5
NO. 39	5. 23				5. 23	0. 2	0. 20	1. 0
BC. 34	3. 03				3. 03	0. 2	0. 20	0. 6
SP. 34	11. 71				11. 71	0. 2	0. 20	2. 3
NO. 40	5. 26				5. 26	0. 2	0. 20	1. 1
EC. 34	6. 44				6. 44	0. 0	0. 10	0. 6
BC. 35	7. 74				7. 74			
NO. 41	5. 82				5. 82	0. 1	0. 05	0. 3
SP. 35	3. 59				3. 59	0. 1	0. 10	0. 4
ECBC36	9. 42				9. 42	3. 0	1. 55	14. 6
NO. 42	6. 99				6. 99	0. 8	1. 90	13. 3
SP. 36	2. 42				2. 42	0. 8	0. 80	1. 9
EC. 36	9. 41				9. 41	0. 5	0. 65	6. 1
NO. 43	8. 17				8. 17	0. 2	0. 35	2. 9
BC. 37	6. 84				6. 84	0. 0	0. 10	0. 7
SP. 37	7. 58				7. 58			
NO. 44	5. 58				5. 58	0. 4	0. 20	1. 1
EC. 37	2. 01				2. 01	0. 4	0. 40	0. 8
BC. 38	12. 77				12. 77	6. 5	3. 45	44. 1
NO. 45	5. 22				5. 22	6. 5	6. 50	33. 9
SP. 38	8. 37				8. 37	6. 5	6. 50	54. 4
NO. 46	11. 63				11. 63	4. 2	5. 35	62. 2
EC. 38	1. 95				1. 95	4. 2	4. 20	8. 2
BC. 39	2. 12				2. 12	4. 2	4. 20	8. 9
SP. 39	3. 38				3. 38	3. 0	3. 60	12. 2
EC. 39	3. 37				3. 37	7. 0	5. 00	16. 9
NO. 46+13. 00	2. 18				2. 18	7. 0	7. 00	15. 3
BC. 40	3. 40				3. 40	7. 0	7. 00	23. 8

盛土法面整形① 数量計算書

[illegible]

法面工 数量計算書

測 点	盛土法面-L (5.0m以上)				盛土法面-R (5.0m以上)			
	点間距離	法長	平 均	面 積	点間距離	法長	平 均	面 積
BP	0.00		-----	-----	0.00		-----	-----
BC.1	7.74				7.74			
SP.1	4.60				4.60			
EC.1	4.59				4.59			
NO.1	3.07				3.07			
BC.2	13.00				13.00			
NO.2	7.00				7.00			
SP.2	1.54				1.54			
EC.2	8.54				8.54			
BC.3	9.90				9.90			
NO.3	0.02				0.02			
SP.3	9.57				9.57			
EC.3	9.59				9.59			
NO.4	0.84				0.84			
BC.4	14.07				14.07			
NO.5	5.93				5.93			
SP.4	4.40				4.40			
EC.4	10.33				10.33			
NO.6	5.27				5.27			
BC.5	3.25				3.25			
SP.5	12.91				12.91			
NO.7	3.84				3.84			
EC.5	9.07				9.07	5.6	2.80	25.4
BC.6	8.33				8.33	8.8	7.20	60.0
NO.8	2.60				2.60	8.8	8.80	22.9
SP.6	8.80				8.80	0.0	4.40	38.7
NO.9	11.20				11.20			
EC.6	0.21				0.21			
BC.7	2.64				2.64			
SP.7	5.35				5.35			
EC.7	5.35				5.35			
NO.10	6.45				6.45			
BC.8	6.44				6.44	8.0	4.00	25.8
SP.8	6.10				6.10	8.5	8.25	50.3
EC.8	6.10				6.10	8.9	8.70	53.1
NO.11	1.36				1.36	8.9	8.90	12.1
BC.9	3.38				3.38	9.5	9.20	31.1
SP.9	5.55				5.55	0.0	4.75	26.4
EC.9	5.55				5.55			
BC.10	3.47				3.47	5.5	2.75	9.5

法面工 数量計算書

測 点	盛土法面-L (5.0m以上)				盛土法面-R (5.0m以上)			
	点間距離	法長	平 均	面 積	点間距離	法長	平 均	面 積
NO. 12	2.05				2.05	5.5	5.50	11.3
SP. 10	8.17				8.17	10.7	8.10	66.2
NO. 12+15.00	6.83				6.83	0.0	5.35	36.5
EC. 10	3.38				3.38			
NO. 13	1.62				1.62			
BC. 11	3.26				3.26			
SP. 11	5.90				5.90			
EC. 11	5.89				5.89			
BC. 12	0.36				0.36			
NO. 14	4.59				4.59			
SP. 12	4.92				4.92			
EC. 12	9.51				9.51			
BC. 13	4.06				4.06			
NO. 15	1.51				1.51			
SP. 13	8.26				8.26			
EC. 13	9.78				9.78			
NO. 16	1.96				1.96			
NO. 17	20.00				20.00			
BC. 14	3.26				3.26			
SP. 14	11.36				11.36			
NO. 18	5.38				5.38			
ECBC15	5.98				5.98			
SP. 15	7.96				7.96			
NO. 19	6.06				6.06			
EC. 15	1.90				1.90			
BC. 16	6.05				6.05			
SP. 16	8.11				8.11			
NO. 20	3.94				3.94			
EC. 16	4.17				4.17			
BC. 17	3.06				3.06			
SP. 17	7.45				7.45			
NO. 21	5.32				5.32			
EC. 17	2.13				2.13			
BC. 18	0.59				0.59			
SP. 18	8.19				8.19			
EC. 18	8.19				8.19			
NO. 22	0.90				0.90			
BC. 19	0.12				0.12			
SP. 19	7.24				7.24			
EC. 19	7.24				7.24			

法面工 数量計算書

測 点	盛土法面-L (5.0m以上)				盛土法面-R (5.0m以上)			
	点間距離	法長	平 均	面 積	点間距離	法長	平 均	面 積
NO. 23	5.40				5.40			
NO. 24	20.00				20.00			
BC. 20	17.91				17.91			
NO. 25	2.09				2.09			
SP. 20	2.57				2.57			
EC. 20	4.66				4.66			
BC. 21	6.26				6.26			
SP. 21	6.40				6.40			
NO. 26	0.11				0.11			
EC. 21	6.29				6.29			
BC. 22	6.37				6.37			
NO. 27	7.34				7.34			
SP. 22	3.26				3.26			
ECBC23	10.60				10.60			
NO. 28	6.14				6.14			
SP. 23	4.46				4.46			
EC. 23, BC. 24	10.61				10.61			
NO. 29	4.93				4.93			
SP. 24	0.23				0.23			
EC. 24	5.16				5.16			
BC. 25	1.74				1.74			
SP. 25	6.00				6.00			
EC. 25	6.00				6.00			
NO. 30	0.87				0.87			
IP. 26	3.21				3.21			
NO. 31	16.79				16.79			
BC. 27	4.21				4.21			
SP. 27	8.50				8.50			
NO. 32	7.29				7.29			
EC. 27	1.22				1.22			
BC. 28	2.62				2.62			
SP. 28	5.08				5.08			
EC. 28	5.08				5.08			
BC. 29	3.35				3.35			
NO. 33	2.64				2.64			
SP. 29	4.55				4.55			
ECBC30	7.19				7.19			
SP. 30	7.20				7.20			
NO. 34	1.06				1.06			
EC. 30	6.13				6.13			

法面工 数量計算書

測 点	盛土法面-L (5.0m以上)				盛土法面-R (5.0m以上)			
	点間 距離	法長	平 均	面 積	点間 距離	法長	平 均	面 積
BC. 31	1.27				1.27			
SP. 31	5.72				5.72			
EC. 31	5.71				5.71			
NO. 35	1.17				1.17			
BC. 32	16.37				16.37			
NO. 36	3.63				3.63			
SP. 32	8.56				8.56			
NO. 37	11.44				11.44			
EC. 32	0.74				0.74			
BC. 33	8.14				8.14			
NO. 38	11.12				11.12			
SP. 33	1.82				1.82			
EC. 33	12.95				12.95			
NO. 39	5.23				5.23			
BC. 34	3.03				3.03			
SP. 34	11.71				11.71			
NO. 40	5.26				5.26			
EC. 34	6.44				6.44			
BC. 35	7.74				7.74			
NO. 41	5.82				5.82			
SP. 35	3.59				3.59			
ECBC36	9.42				9.42			
NO. 42	6.99				6.99			
SP. 36	2.42				2.42			
EC. 36	9.41				9.41			
NO. 43	8.17				8.17			
BC. 37	6.84				6.84			
SP. 37	7.58				7.58			
NO. 44	5.58				5.58			
EC. 37	2.01				2.01			
BC. 38	12.77				12.77			
NO. 45	5.22				5.22			
SP. 38	8.37				8.37			
NO. 46	11.63				11.63			
EC. 38	1.95				1.95			
BC. 39	2.12				2.12			
SP. 39	3.38				3.38			
EC. 39	3.37				3.37	7.0	3.50	11.8
NO. 46+13.00	2.18				2.18	7.0	7.00	15.3
BC. 40	3.40				3.40	7.0	7.00	23.8

法面工 数量計算書

[illegible]

路盤工 数量計算書

測 点	路盤工 (t=100mm)				
	点間 距離	幅	平 均	面 積	備考
BP	0.00	4.25	-----	-----	
BC. 1	7.74	4.25	4.250	32.90	
SP. 1	4.60	4.25	4.250	19.55	
EC. 1	4.59	4.09	4.170	19.14	
NO. 1	3.07	3.67	3.880	11.91	
BC. 2	13.00	3.00	3.335	43.36	
NO. 2	7.00	3.00	3.000	21.00	
SP. 2	1.54	3.00	3.000	4.62	
EC. 2	8.54	3.00	3.000	25.62	
BC. 3	9.90	3.87	3.435	34.01	
NO. 3	0.02	3.87	3.870	0.08	
SP. 3	9.57	4.00	3.935	37.66	
EC. 3	9.59	3.87	3.935	37.74	
NO. 4	0.84	3.78	3.825	3.21	
BC. 4	14.07	4.31	4.045	56.91	
NO. 5	5.93	4.50	4.405	26.12	
SP. 4	4.40	4.50	4.500	19.80	
EC. 4	10.33	4.44	4.470	46.18	
NO. 6	5.27	3.96	4.200	22.13	
BC. 5	3.25	3.66	3.810	12.38	
SP. 5	12.91	3.50	3.580	46.22	
NO. 7	3.84	3.50	3.500	13.44	
EC. 5	9.07	3.92	3.710	33.65	
BC. 6	8.33	5.16	4.540	37.82	
NO. 8	2.60	5.25	5.205	13.53	
SP. 6	8.80	5.25	5.250	46.20	
NO. 9	11.20	5.37	5.310	59.47	
EC. 6	0.21	5.36	5.365	1.13	
BC. 7	2.64	5.23	5.295	13.98	
SP. 7	5.35	4.75	4.990	26.70	
EC. 7	5.35	4.75	4.750	25.41	
NO. 10	6.45	4.87	4.810	31.02	
BC. 8	6.44	5.00	4.935	31.78	
SP. 8	6.10	5.00	5.000	30.50	
EC. 8	6.10	5.13	5.065	30.90	
NO. 11	1.36	5.18	5.155	7.01	
BC. 9	3.38	5.27	5.225	17.66	
SP. 9	5.55	5.25	5.260	29.19	
EC. 9	5.55	5.25	5.250	29.14	
BC. 10	3.47	5.00	5.125	17.78	

路盤工 数量計算書

測 点	路盤工 (t=100mm)				
	点間 距離	幅	平 均	面 積	備考
NO. 12	2.05	5.00	5.000	10.25	
SP. 10	8.17	5.00	5.000	40.85	
NO. 12+15.00	6.83	4.99	4.995	34.12	
EC. 10	3.38	4.83	4.910	16.60	
NO. 13	1.62	4.64	4.735	7.67	
BC. 11	3.26	4.25	4.445	14.49	
SP. 11	5.90	4.25	4.250	25.08	
EC. 11	5.89	5.08	4.665	27.48	
BC. 12	0.36	5.14	5.110	1.84	
NO. 14	4.59	5.25	5.195	23.85	
SP. 12	4.92	5.25	5.250	25.83	
EC. 12	9.51	5.08	5.165	49.12	
BC. 13	4.06	4.45	4.765	19.35	
NO. 15	1.51	4.22	4.335	6.55	
SP. 13	8.26	3.50	3.860	31.88	
EC. 13	9.78	5.88	4.690	45.87	
NO. 16	1.96	5.88	5.880	11.52	
NO. 17	20.00	7.19	6.535	130.70	
BC. 14	3.26	7.12	7.155	23.33	
SP. 14	11.36	5.25	6.185	70.26	
NO. 18	5.38	5.25	5.250	28.25	
ECBC15	5.98	5.25	5.250	31.40	
SP. 15	7.96	4.47	4.860	38.69	
NO. 19	6.06	4.43	4.450	26.97	
EC. 15	1.90	4.66	4.545	8.64	
BC. 16	6.05	5.18	4.920	29.77	
SP. 16	8.11	5.25	5.215	42.29	
NO. 20	3.94	5.25	5.250	20.69	
EC. 16	4.17	5.04	5.145	21.45	
BC. 17	3.06	4.33	4.685	14.34	
SP. 17	7.45	3.50	3.915	29.17	
NO. 21	5.32	4.07	3.785	20.14	
EC. 17	2.13	4.35	4.210	8.97	
BC. 18	0.59	4.42	4.385	2.59	
SP. 18	8.19	4.68	4.550	37.26	
EC. 18	8.19	5.25	4.965	40.66	
NO. 22	0.90	5.25	5.250	4.73	
BC. 19	0.12	5.25	5.250	0.63	
SP. 19	7.24	5.25	5.250	38.01	
EC. 19	7.24	5.25	5.250	38.01	

路盤工 数量計算書

測 点	路盤工 (t=100mm)				
	点間 距離	幅	平 均	面 積	備考
NO. 23	5.40	3.74	4.495	24.27	
NO. 24	20.00	3.00	3.370	67.40	
BC. 20	17.91	4.07	3.535	63.31	
NO. 25	2.09	4.23	4.150	8.67	
SP. 20	2.57	4.25	4.240	10.90	
EC. 20	4.66	4.25	4.250	19.81	
BC. 21	6.26	4.25	4.250	26.61	
SP. 21	6.40	4.25	4.250	27.20	
NO. 26	0.11	4.25	4.250	0.47	
EC. 21	6.29	4.42	4.335	27.27	
BC. 22	6.37	5.19	4.805	30.61	
NO. 27	7.34	5.25	5.220	38.31	
SP. 22	3.26	5.25	5.250	17.12	
ECBC23	10.60	5.25	5.250	55.65	
NO. 28	6.14	5.25	5.250	32.24	
SP. 23	4.46	5.25	5.250	23.42	
EC. 23, BC. 24	10.61	5.10	5.175	54.91	
NO. 29	4.93	4.75	4.925	24.28	
SP. 24	0.23	4.75	4.750	1.09	
EC. 24	5.16	4.85	4.800	24.77	
BC. 25	1.74	5.03	4.940	8.60	
SP. 25	6.00	5.13	5.080	30.48	
EC. 25	6.00	4.30	4.715	28.29	
NO. 30	0.87	4.09	4.195	3.65	
IP. 26	3.21	3.26	3.675	11.80	
NO. 31	16.79	3.95	3.605	60.53	
BC. 27	4.21	5.00	4.475	18.84	
SP. 27	8.50	5.00	5.000	42.50	
NO. 32	7.29	5.00	5.000	36.45	
EC. 27	1.22	5.00	5.000	6.10	
BC. 28	2.62	4.66	4.830	12.65	
SP. 28	5.08	4.00	4.330	22.00	
EC. 28	5.08	4.48	4.240	21.54	
BC. 29	3.35	5.11	4.795	16.06	
NO. 33	2.64	5.25	5.180	13.68	
SP. 29	4.55	5.25	5.250	23.89	
ECBC30	7.19	5.25	5.250	37.75	
SP. 30	7.20	5.25	5.250	37.80	
NO. 34	1.06	3.25	4.250	4.51	
EC. 30	6.13	5.07	4.160	25.50	

路盤工 数量計算書

測 点	路盤工 (t=100mm)				
	点間 距離	幅	平 均	面 積	備考
BC. 31	1. 27	4. 79	4. 930	6. 26	
SP. 31	5. 72	4. 25	4. 520	25. 85	
EC. 31	5. 71	4. 25	4. 250	24. 27	
NO. 35	1. 17	4. 32	4. 285	5. 01	
BC. 32	16. 37	5. 25	4. 785	78. 33	
NO. 36	3. 63	5. 25	5. 250	19. 06	
SP. 32	8. 56	5. 25	5. 250	44. 94	
NO. 37	11. 44	5. 25	5. 250	60. 06	
EC. 32	0. 74	5. 25	5. 250	3. 89	
BC. 33	8. 14	4. 25	4. 750	38. 67	
NO. 38	11. 12	4. 25	4. 250	47. 26	
SP. 33	1. 82	4. 25	4. 250	7. 74	
EC. 33	12. 95	4. 25	4. 250	55. 04	
NO. 39	5. 23	4. 88	4. 565	23. 87	
BC. 34	3. 03	5. 25	5. 065	15. 35	
SP. 34	11. 71	5. 25	5. 250	61. 48	
NO. 40	5. 26	5. 25	5. 250	27. 62	
EC. 34	6. 44	5. 25	5. 250	33. 81	
BC. 35	7. 74	5. 00	5. 125	39. 67	
NO. 41	5. 82	5. 00	5. 000	29. 10	
SP. 35	3. 59	5. 00	5. 000	17. 95	
ECBC36	9. 42	5. 00	5. 000	47. 10	
NO. 42	6. 99	5. 17	5. 085	35. 54	
SP. 36	2. 42	5. 17	5. 170	12. 51	
EC. 36	9. 41	5. 50	5. 335	50. 20	
NO. 43	8. 17	5. 50	5. 500	44. 94	
BC. 37	6. 84	5. 50	5. 500	37. 62	
SP. 37	7. 58	5. 50	5. 500	41. 69	
NO. 44	5. 58	4. 00	4. 750	26. 51	
EC. 37	2. 01	4. 00	4. 000	8. 04	
BC. 38	12. 77	4. 09	4. 045	51. 65	
NO. 45	5. 22	4. 25	4. 170	21. 77	
SP. 38	8. 37	4. 25	4. 250	35. 57	
NO. 46	11. 63	4. 25	4. 250	49. 43	
EC. 38	1. 95	4. 25	4. 250	8. 29	
BC. 39	2. 12	4. 25	4. 250	9. 01	
SP. 39	3. 38	4. 25	4. 250	14. 37	
EC. 39	3. 37	4. 25	4. 250	14. 32	
NO. 46+13. 00	2. 18	4. 05	4. 150	9. 05	
BC. 40	3. 40	3. 75	3. 900	13. 26	

路盤工 数量計算書

[illegible]

曲線部・測点間距離修正表

川本808号線 路盤掘削

測点番号	測点間距離	曲線 番号	曲線番号及び 曲線半径	中心線との 偏倚長(d)	平均偏倚長 d	修正率 (c)=(R±d)/R	修正距離
BC.6		IP.6	R=12 左	1.08			
NO.8	2.6		-12.0	1.13	1.103	0.908	2.4
SP.6	8.8		-12.0	1.13	1.125	0.906	8.0
NO.9	11.2		-12.0	0.63	0.878	0.927	10.4
EC.6	0.2		-12.0	0.63	0.630	0.948	0.2
BC.10		IP.10	R=13 右	0.25			
NO.12	2.1		13.0	0.25	0.250	1.019	2.1
SP.10	8.2		13.0	0.25	0.250	1.019	8.4
NO.12+15	6.8		13.0	0.25	0.250	1.019	6.9
EC.10	3.4		13.0	0.30	0.273	1.021	3.5
BC.12		IP.12	R=12 左	1.01			
NO.14	6.0		-12.0	1.13	1.068	0.911	5.5
SP.12	0.4		-12.0	1.13	1.125	0.906	0.4
EC.12	1.6		-12.0	0.99	1.058	0.912	1.5
BC.14		IP.14	R=12 右	-1.01			
SP.14	11.4		12.0	-1.13	-1.065	0.911	10.4
NO.18	5.4		12.0	-1.13	-1.125	0.906	4.9
ECBC15	6.0		12.0	-0.99	-1.058	0.912	5.5
BC.22		IP.22	R=12 左	1.10			
NO.27	7.3		-12.0	1.13	1.110	0.908	6.6
SP.22	3.3		-12.0	1.13	1.125	0.906	3.0
ECBC23	10.6		-12.0	1.13	1.125	0.906	9.6
NO.28	6.1		-12.0	1.13	1.125	0.906	5.5
SP.23	4.5		-12.0	1.13	1.125	0.906	4.1
EC.23	10.6		-12.0	1.05	1.088	0.909	9.6
BC.32		IP.32	R=12 右	1.13			
NO.36	3.6		12.0	1.13	1.125	1.094	3.9
SP.32	8.6		12.0	1.13	1.125	1.094	9.4
NO.37	11.5		12.0	1.13	1.125	1.094	12.6
EC.32	0.7		12.0	1.13	1.125	1.094	0.8
BC.34		IP.14	R=12 右	1.13			
SP.34	11.7		12.0	1.13	1.125	1.094	12.8
NO.40	5.3		12.0	1.13	1.125	1.094	5.8
EC.34	6.4		12.0	1.13	1.125	1.094	7.0


排水構造物工				
数 量 調 書				
名 称	測 点(左 側)	測 点(右 側)	延長 (箇所)	備 考(参考)
木製路面排水工	NO.0+5.0		5.0	200型(1箇所)、300型(1箇所)
		NO.5+4.7	6.0	300型(2箇所)
		NO.10+0.4	6.0	300型(2箇所)
		NO.12+11.0	6.0	300型(2箇所)
		NO.21+18.7	6.0	300型(2箇所)
		NO.26+12.4	6.0	300型(2箇所)
		NO.34+18.1	5.0	200型(1箇所)、300型(1箇所)
		NO.39+16.3	6.0	300型(2箇所)
		NO.42+6.7	6.0	300型(2箇所)
		NO.45+14.5	5.0	200型(1箇所)、300型(1箇所)
		NO.48+7.4	5.0	200型(1箇所)、300型(1箇所)
小 計			62.0	200型(4箇所)、300型(18箇所)

排水構造物工 土工数量集計表

名 称	土工 延長・箇所	床 掘		埋 戻	残 土	10m当り数量 m ³		備考
		土砂	×0.9			床掘	埋戻	
地下排水工								
φ 150	計算書より	18.6	16.7		16.7			NO.17+14.3
合 計		18.6	16.7	0.0	16.7			

[illegible]

地下排水工 数量計算書

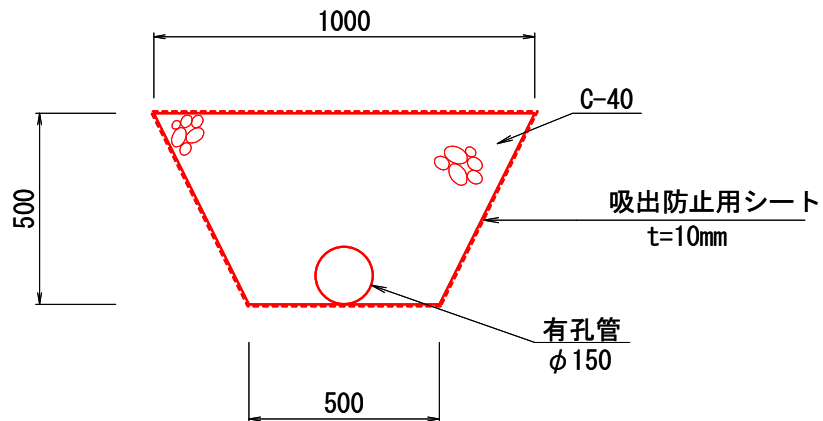

数量表

10m当り

名 称	規 格	単 位	数 量
有 孔 管	ホリエチレン管	m	10.0
巻立碎石	C-40	m ³	3.57
吸出防止用シート	t=10mm	m ²	26.2

施工箇所・延長 49.0 m

名 称	規 格	計 算 式	(10m 当り)		延長・箇所	数 量
			単位	数量		
有孔管	φ 150		10.00 m		49.0	49.00
巻立碎石	C-40	標準図集より	3.57 m ³		49.0	17.49
吸出防止材	吸出防止シート t=10mm	標準図集より	26.20 m ²		49.0	128.38
床掘		$(1.00+0.50) \times 1/2 \times 0.50 \times 10.0$	3.8 m ³		49.0	18.6

工種種別：


数量計算書

[illegible]

工種種別：

林業施業用施設①盛土

数量計算書

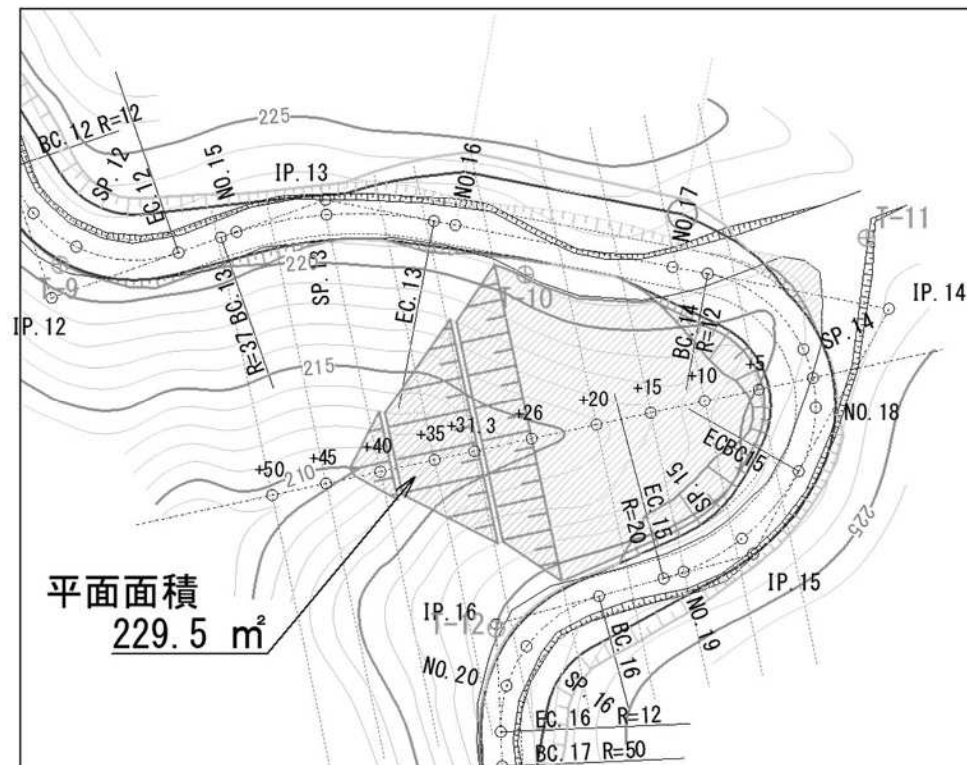[illegible]