


【金城293号線】

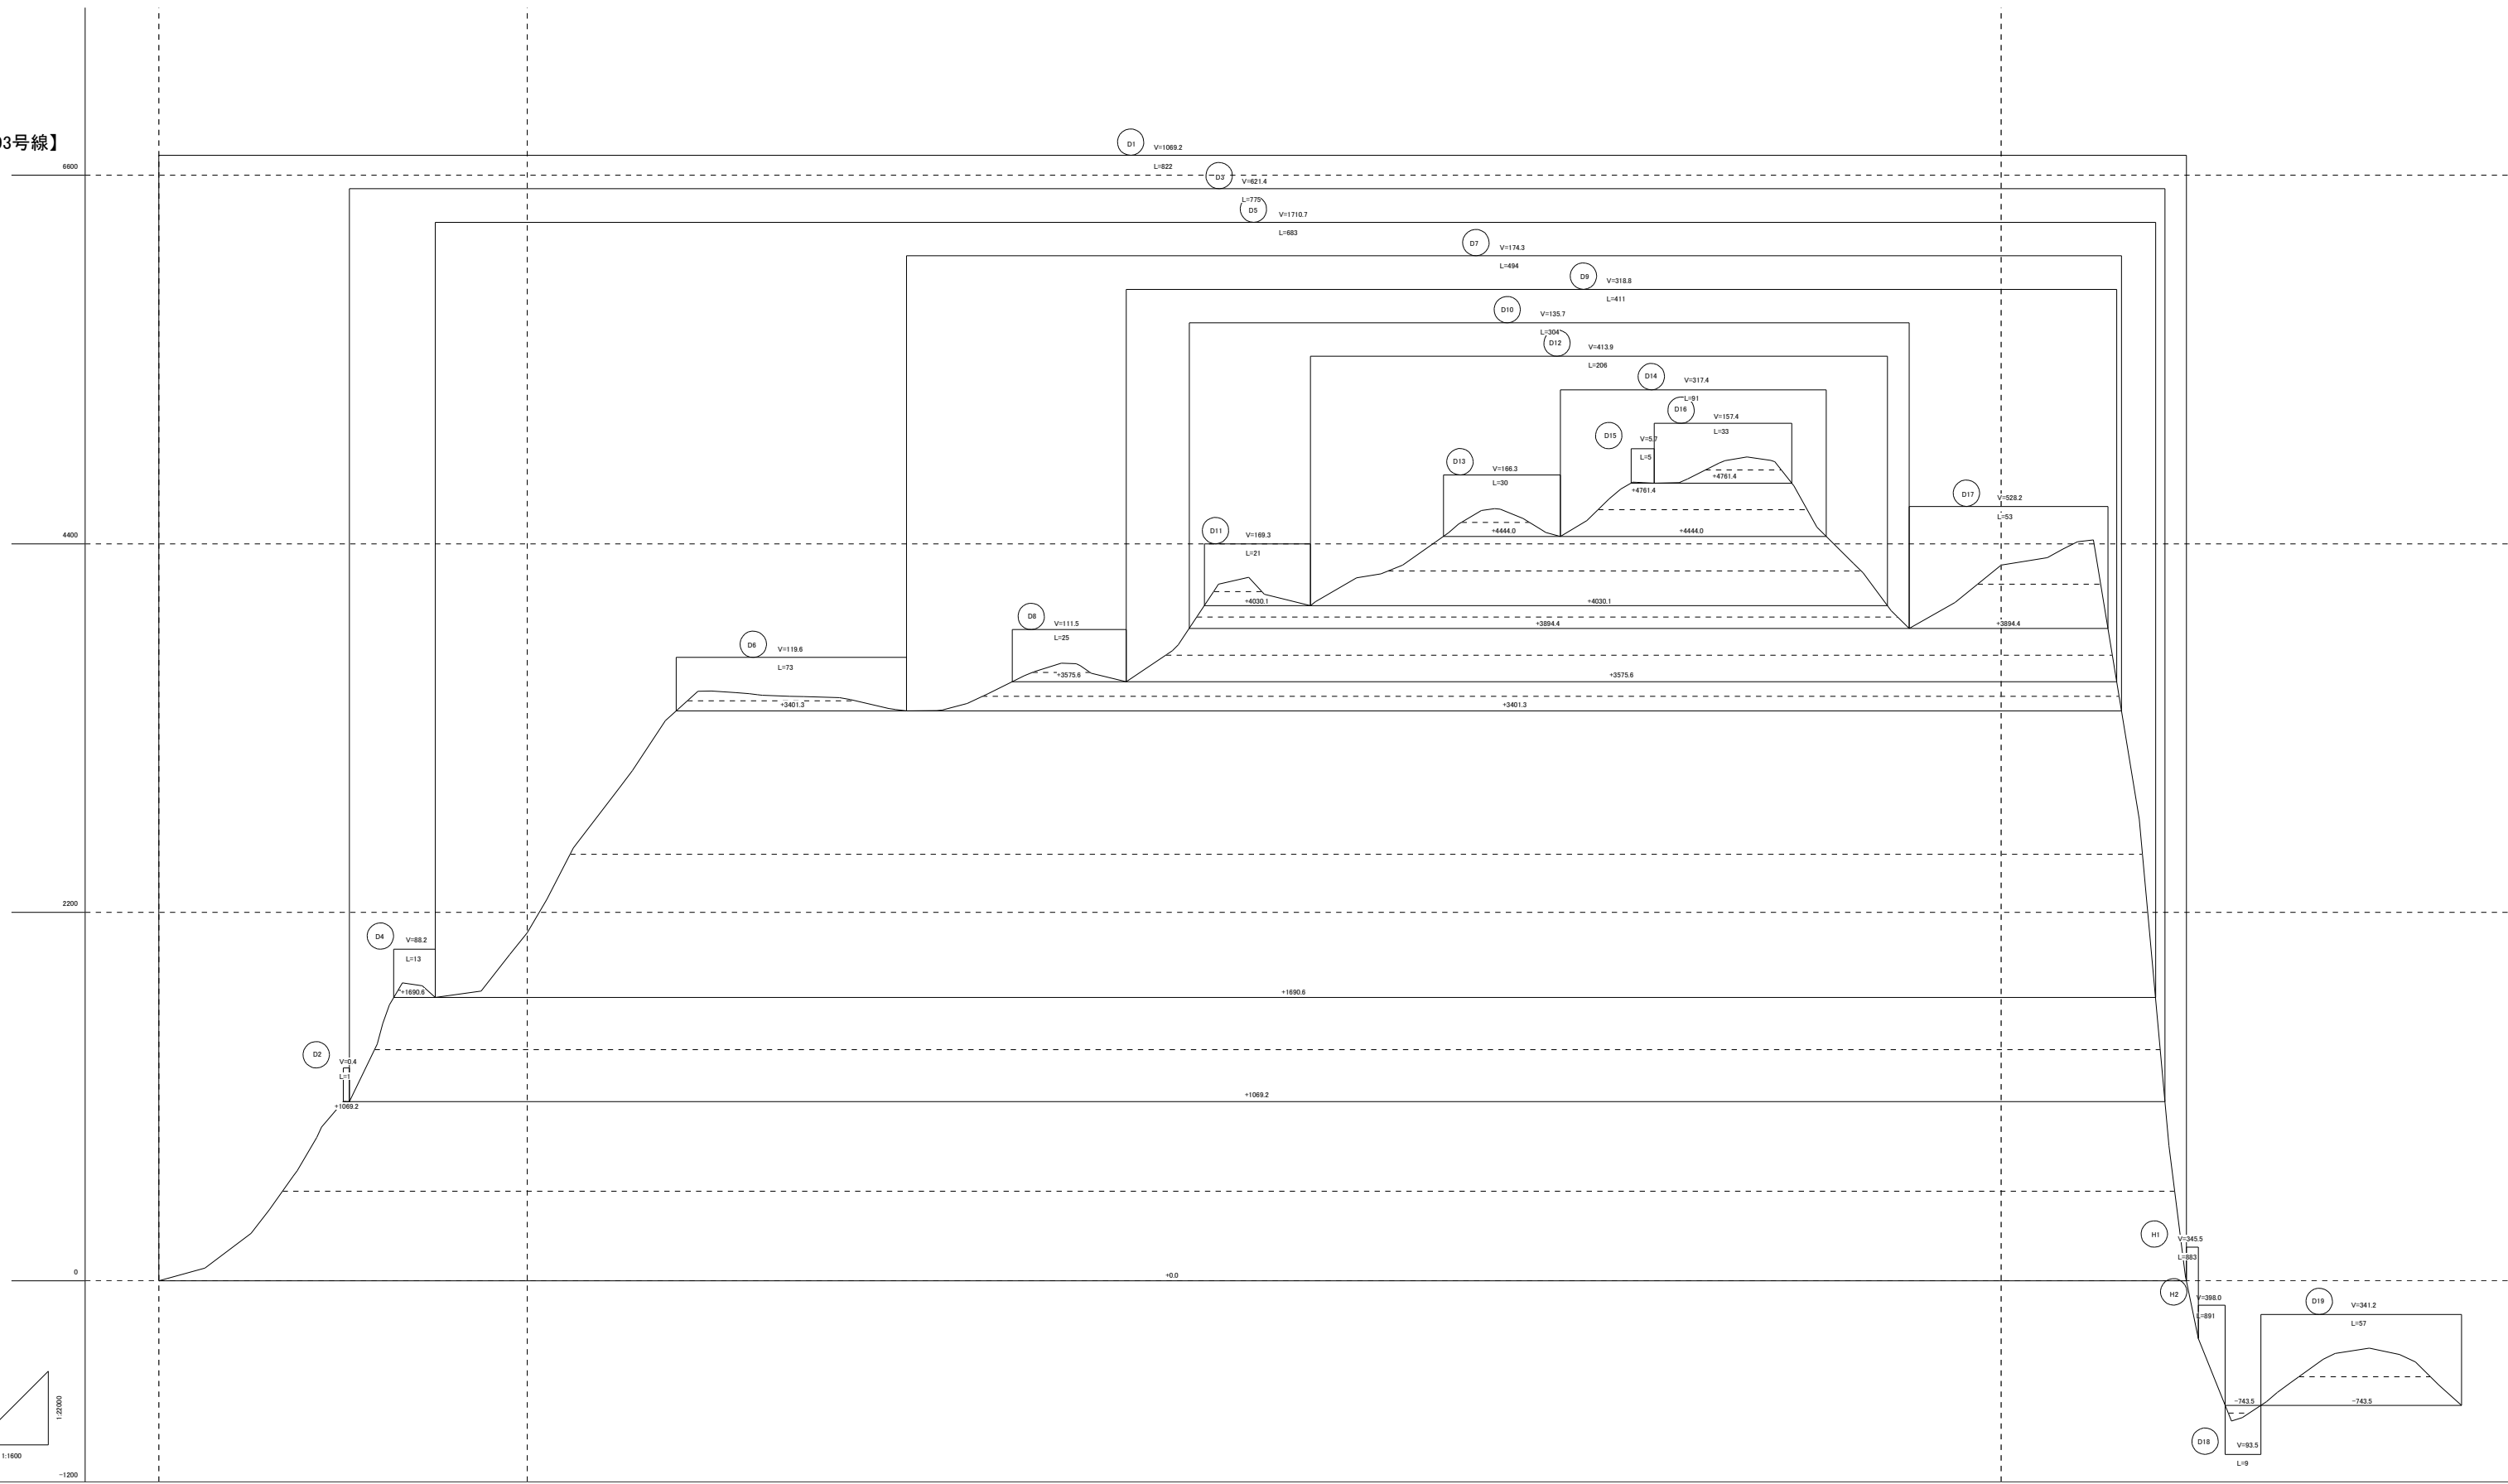

累加土量	追加距離	測点名
0.0	0.0	ND0
74.5	20.0	ND1
260.0	40.0	ND2
424.4	48.0	BC1
624.5	60.0	MC1
806.7	68.0	ND3
917.2	70.0	EC2
1088.6	80.0	ND4
1431.1	82.0	MC2
1638.6	84.0	EC3
1738.8	86.0	ND5
1766.5	88.0	EC3
1806.6	90.0	ND6
1726.1	92.0	ND7
1947.6	94.0	BC4
2076.5	96.0	ND8
2276.6	98.0	EC4
2556.4	100.0	ND9
2942.9	200.0	ND10
3046.0	205.0	BC5
3342.8	230.0	ND11
3518.6	234.0	EC5
3528.9	240.0	ND12
3611.0	246.0	BC6
3694.0	250.0	MC9
3866.7	252.0	EC9
3882.2	274.0	BC7
3882.2	280.0	ND14
3851.9	295.0	MC7
3470.0	300.0	ND15
3418.2	320.0	EC10
3401.3	324.0	BC8
3403.5	337.0	MC8
3406.8	340.0	ND17
3446.3	351.0	EC8
3506.4	360.0	ND18
3611.6	375.0	MC9
3638.6	380.0	ND19
3811.1	391.0	EC20
3722.0	400.0	ND20
3872.2	404.0	EC10
3735.6	430.0	ND21
3796.8	440.0	BC22
3796.8	442.0	ND22
4157.9	460.0	MC11
4157.9	462.0	ND23
4199.4	472.0	EC11
4098.8	480.0	ND24
4025.7	522.0	MC12
4196.0	530.0	ND26
4258.6	532.0	EC12
4271.5	540.0	ND27
4451.6	564.0	BC13
4458.9	566.0	MC13
4518.8	584.0	ND28
4699.0	574.0	EC13
4604.1	582.0	BC14
4651.6	592.0	MC14
4487.6	592.0	EC14
4444.0	608.0	BC15
4527.9	620.0	ND31
4682.3	624.0	EC15
4676.5	626.0	MC15
4721.1	640.0	ND32
4741.4	649.0	MC16
4797.4	660.0	EC16
4896.7	682.0	MC17
4818.8	688.0	ND34
4824.2	702.0	EC17
4746.1	710.0	ND35
4468.1	720.0	ND36
4626.6	730.0	MC18
4272.2	740.0	ND37
3964.4	752.0	EC18
3894.4	760.0	ND38
4048.6	780.0	ND39
4271.9	800.0	ND40
4116.1	820.0	ND41
4086.9	824.0	BC19
4111.1	831.0	MC19
4422.6	840.0	ND42
2756.7	860.0	ND43
296.2	872.0	MC20
28.5	880.0	ND44
-342.5	885.0	EC20
-937.0	904.0	ND45
-721.9	912.0	MC21
-606.6	922.0	EC21
-483.3	930.0	ND47
-432.7	940.0	BC22
-402.3	950.0	ND48
-441.1	970.0	EC22
-481.1	974.0	ND49
-421.1	980.0	ND49
-742.5	990.0	ND50

運搬土量総括表

□ ダンプトラック運搬土

運搬	L	BH土砂										V	VL	備考
D1	822	1069.2										1069.2	878882.4	
D2	1	0.4										0.4	0.4	
D3	775	621.4										621.4	481585.0	
D4	13	88.2										88.2	1146.6	
D5	683	1710.7										1710.7	1168408.1	
D6	73	119.6										119.6	8730.8	
D7	494	174.3										174.3	86104.2	
D8	25	111.5										111.5	2787.5	
D9	411	318.8										318.8	131026.8	
D10	304	135.7										135.7	41252.8	
D11	21	169.3										169.3	3555.3	
D12	206	413.9										413.9	85263.4	
D13	30	166.3										166.3	4989.0	
D14	91	317.4										317.4	28883.4	
D15	5	5.7										5.7	28.5	
D16	33	157.4										157.4	5194.2	
D17	53	528.2										528.2	27994.6	
D18	9	93.5										93.5	841.5	
D19	57	341.2										341.2	19448.4	
合計		6542.7										6542.7	2976122.9	$\bar{L} = 454.9 = 440$

□ 横方向盛土

運搬	L	BH土砂										V	VL	備考
合計	10	1017.5										1017.5		

補給土量総括表

□ 補給土

運 搬	L	V	VL	備 考
H1	883	345.5	305081.1	
H2	891	398.0	354789.3	
合 計		743.5	659870.4	$\bar{L} = 887.5 = 880$